
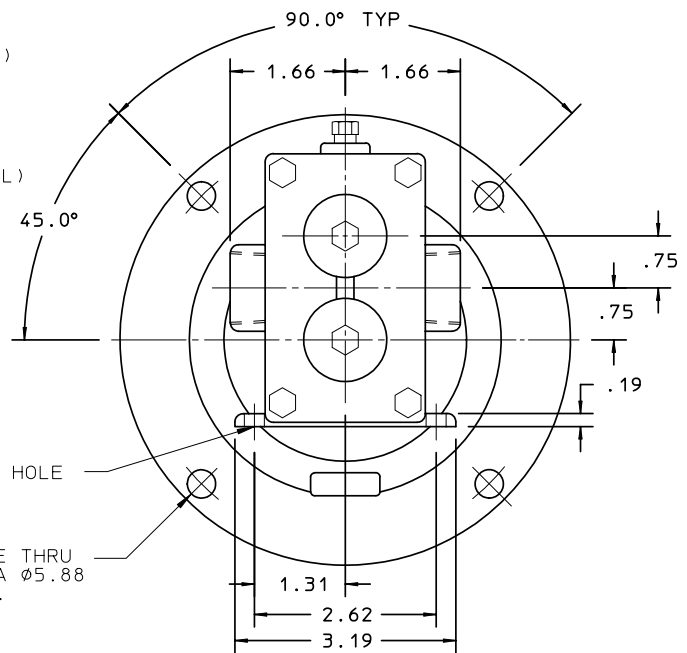


REF: ADD OPTIONAL FLANGE
REVISION UPDATE
DATE: 03/27/01

SECTION/PAGE: EFFECTIVE
C/GA6/GC6/6224
03/27/01
SUPERSEDES: 12/01/97



DWN BY: PEM
DATE: 04/28/97
SD-2852

ALL DIMENSIONS ARE IN INCHES
ECO
PULSAFEEDER
A Unit of IDEX Corporation
DIMENSIONAL DRAWING
GA6/GC6 PUMP UNMOUNTED

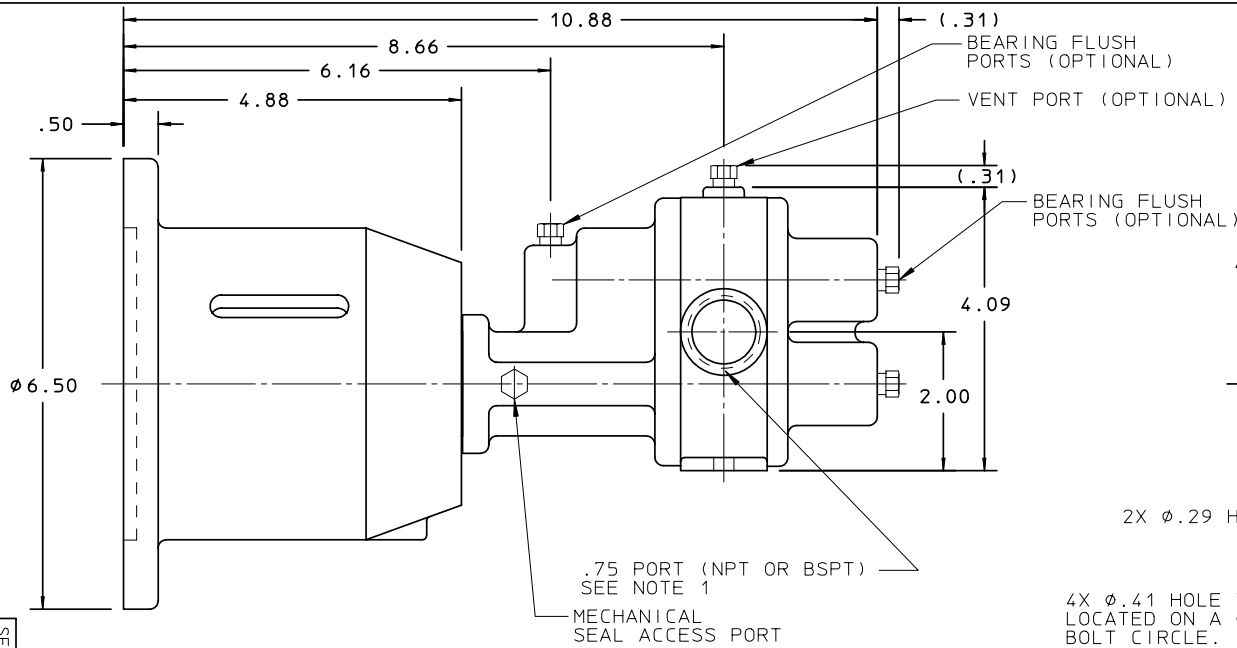

- NOTES:
1) SUCTION AND DISCHARGE PORTS ARE DEPENDENT UPON ROTATION.
2) ALL STANDARD AND OPTIONAL PIPE PLUGS ARE .125 NPT.
3) MODEL GC6 REQUIRES A FOOT MOUNTED C-FACE MOTOR FRAME SIZE 56C, 143TC, 145TC, 182C OR 184C.

GC6 SINGLE / DOUBLE MECHANICAL SEAL

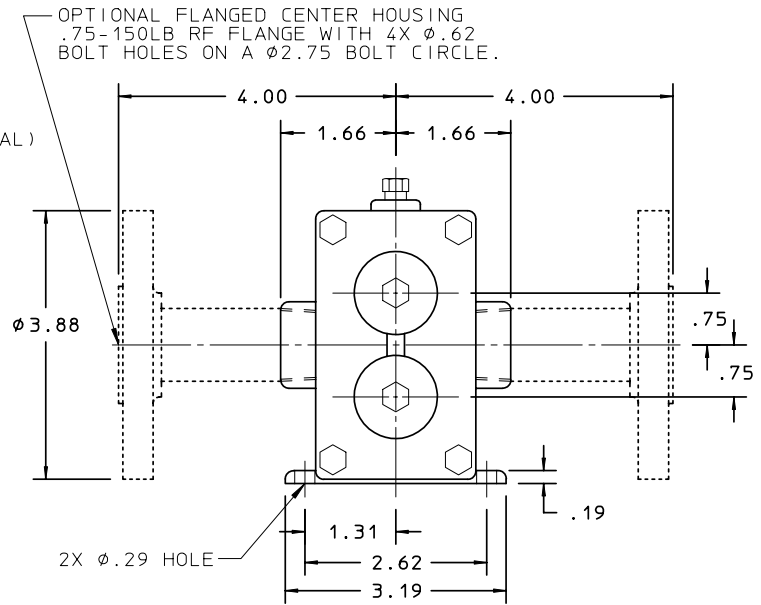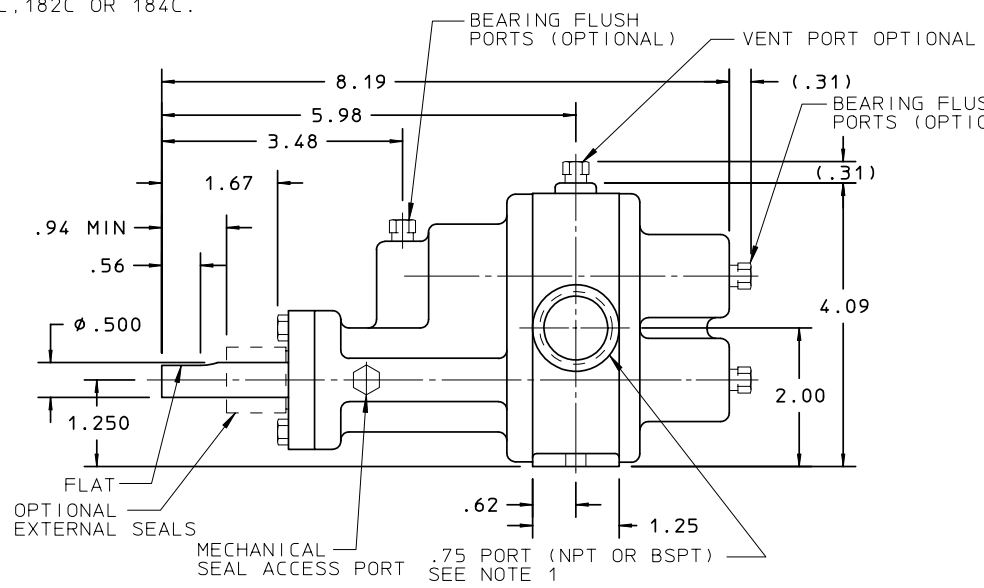

GA6 SINGLE / DOUBLE MECHANICAL SEAL